



MOVING YOU FURTHER

# 300D-9



Some of the photos may include optional equipment

# Your satisfaction is our priority.

## Proven technology! Hyundai 9 Series diesel forklift

The Hyundai 9 Series big diesel forklift is ready for the customers. Overwhelming the worksite with its superior performance and providing optimal fuel efficiency, the Hyundai 9 Series big diesel forklift offers outstanding durability based on its application of high-quality hydraulic and functional components suitable for large and heavy load duties, as well as comfortable and pleasant driving space, and convenient after-sales management.

### Excellent performance

- Eco-friendly, powerful, 278ps Cummins QSL9 engine
- Fully automatic ZF electronic transmission with 3 forward-reverse shifts
- Wet disc brake & Kessler drive axle with planetary final reduction gears
- 3-stage TS mast (STD)

### Ensured safety at the logistics site

- Auto parking brake
- Real-time notification of rear wheel steering angle
- Operator presence sensing system (OPSS)

### Comfortable and safe driving

- Deluxe cabin equipped with fully automatic air conditioning
- Hydraulic pilot valve lever
- Load weight indicator (OPT)
- Password starting system

### Convenient management

- One-touch electric motor-driven tilting cabin
- Notification of replacement of the consumable items
- Engine fault diagnosis





## Power & Performance

# High Efficiency, Optimal Performance

Robust, refined, and luxurious design – 300D-9!  
Offering increased power and fuel economy,  
this model will be your best partner in  
any work environment.



Some of the photos may include optional equipment

## Powerful and economical Cummins QSL9 Engine

The six-cylinder QSL9 engine, equipped with the German Bosch's fuel system proven for its reliability and durability, shows lower vibration compared to other engines, delivers excellent cold-start performance, and does not emit white smoke in the winter. Moreover, its combination with the ZF transmission, optimized in fuel injection control and improved in driving efficiency, further enhances fuel efficiency and performance. In particular, you can experience increased power during operations due to its high torque at low and medium speeds, and DOC and SCR emission aftertreatment systems have been applied to satisfy Tier 4. (requires urea solution)



•278ps/2,200rpm •124kgf.m/1,500rpm

## Gradeability and travel speed

With the best engine power, it delivers outstanding running performance and exceptional gradeability, ensuring stable operation at high speeds, on rough terrains and slopes.



30.4% (17.0°)

Max. Gradeability (Loaded)



30.8km/h

Max. Travel Speed (Unloaded)



ZF Full-automatic transmission

Due to optimized engine and performance of the transmission, acceleration performance in low-speed sections has improved and noise heat generation has reduced. Also, it is possible to check the transmission status/failure etc. on the display window of the cluster.




Drive axle & Wet disc brake

Kessler's high capacity drive axle, the planetary gear type, enables outstanding power transmission and shows exceptional adaptability to sudden changes in torque. Also, wet-type multi-plate service brake delivers consistent braking power when operations are repeated.




Hydraulic steering axle

The hydraulic steering system allows light and easy operation control without overruns or kickbacks caused by the road profile. Taper roller bearings and ADI knuckles with excellent strength and wear resistance are used in consideration of heavy load operation. The newly added protector prevents damage of rear wheel hub bolts.

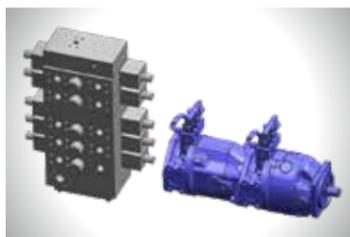

Load sensing hydraulic system

Hydraulic system consisting of a Bosch's swash plate piston pump and control valve optimizes energy consumption and increases durability of engine and transmission.

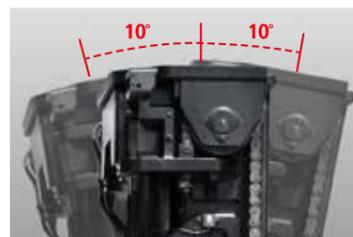

Mast Tilting Angle


Tilting speed is improved by combining some hydraulic pressure generated from the secondary pump to the primary pump flow rate. The tilting angle of 10 degrees forward and 10 degrees backward increases work efficiency.

Engine mode control

Engine performance can be adjusted to suit the workload, simply by operating a switch mounted on the side panel.  
STD mode : Light load operations (fuel saving mode)  
PWR mode : Operations on slope Requiring intense power

Low engine RPM conversion

Depending on the need, the driver can convert the engine to a low RPM. The RPM will return to its initial settings value once engine is stopped and restarted.

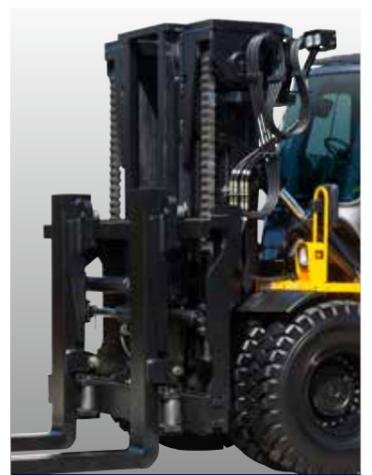

3-stage T/S mast


The 4.7m T/S(Triplex Separated Full Free) mast is adopted as a standard to enable better handling of large and heavy work and wider visibility. Also, it adopts BL2066 chain and chain sheave bearings with 70% improved dynamic load capacity compared to the 250D-9.



Easy & Comfort

# Comfortable Workspace Intuitive Monitoring


Ergonomically designed workspace for operator provides the best comfort in any type of operation.

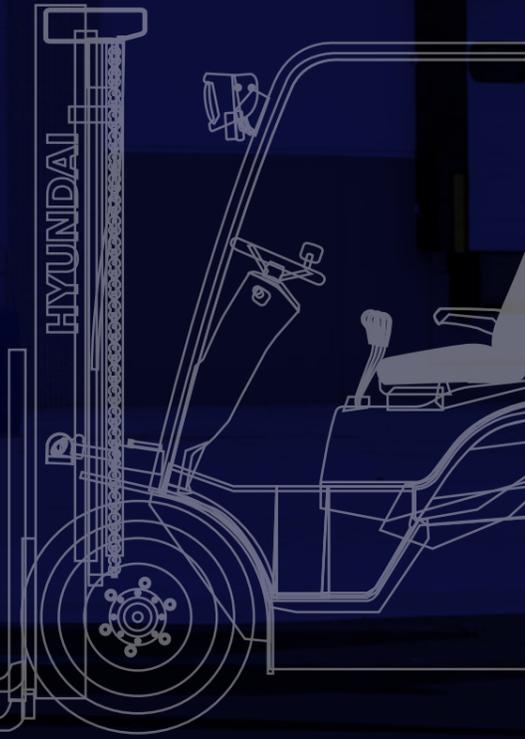

Some of the photos may include optional equipment

## Ergonomic operating space

The ergonomically designed operating space was made for more space, a wider field of view and operator comfort. The smooth lever and pedal operation, adjustable tilting handle, suspension seat and deluxe cabin provide comfortable and efficient operation.

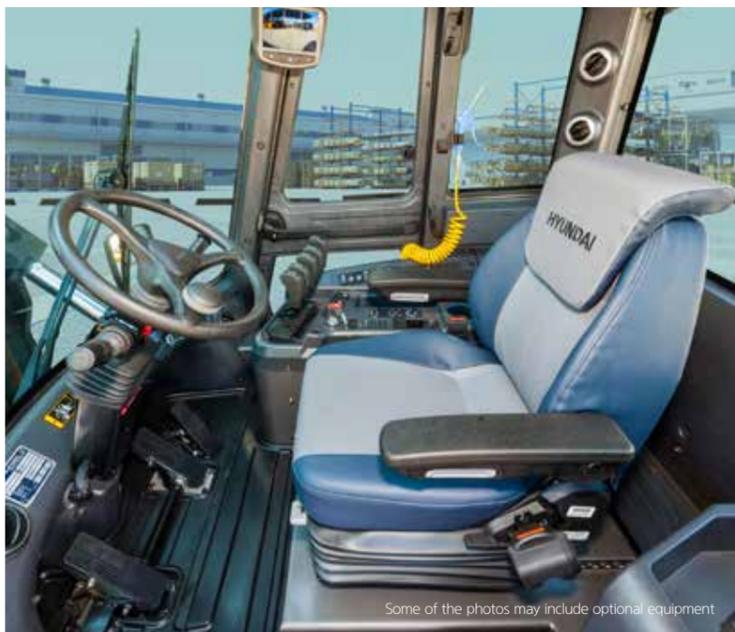

Some of the photos may include optional equipment



### Full air suspension seat (OPT)

Ergonomically designed to support a comfortable posture, the full suspension seat relieves fatigue and enables greater comfort for operation.

## New style & centralized cluster

The TFT LCD color monitor indicates real-time driving information and changing vehicle stability depending on the work condition, thus allowing easy and efficient control for the operator. Diagnostic error codes allow easy trouble-shooting and the operator can select various performance modes.



### Main Functions

- Urea level gauge
- T/M information display
- Parking brake indicator
- Battery charging failure warning
- Brake system overheat warning
- Air cleaner filter warning
- Machine inclination warning
- Load weight indicator
- Steering wheel position
- Engine coolant temperature warning
- Engine check warning lamp
- Seatbelt warning
- Exchange consumable indicator
- Mast tilt angle indicator
- High beam indicator
- T/M error warning
- OPSS indicator
- Inching indicator



### Fully automatic air-conditioner

The air-conditioner automatically adjusts temperature to the set temperature and provides more comfortable working environment for the operator.




### Responsive levers

Responsive levers with the latest hydraulic system enables micromanipulation and excellent performance. (5-Lever, 6-Function : STD / 7-Function : OPT)



### Ergonomic pedals

The high-quality floor mat and ergonomically designed pedal arrangement reduce operator fatigue and drastically improve productivity.

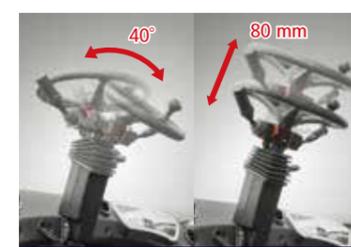

### Adjustable steering wheel

The steering wheel can be pushed forward or backward, pushed in or out to suit the driver's body shape, providing an all the more comfortable work environment.



### Integrated communications controller


Cutting-edge communications technology enhances the operator convenience (Bluetooth hands-free, cellphone call, radio communication, USB/MP3 audio control functions).



Secure & Safety

# Excellent visibility Advanced safety

The safely designed driver's space makes your operating more comfortable.

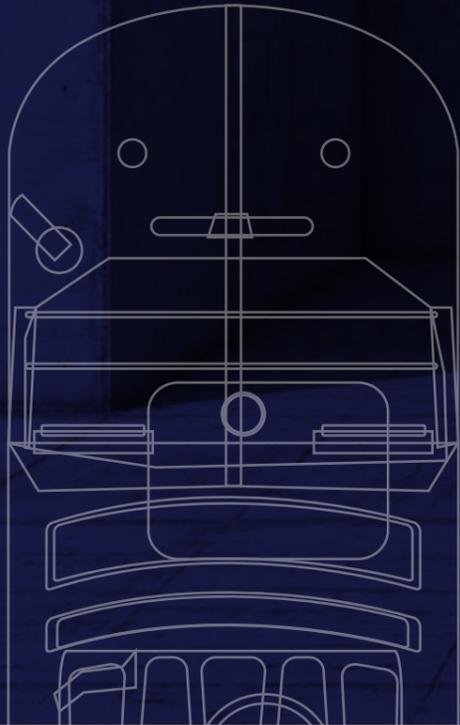

Some of the photos may include optional equipment




## Excellent visibility for safe operation

Optimized lift cylinder arrangement provides the operator with wider visibility. A panoramic mirror expands the driver's rear view.



Some of the photos may include optional equipment

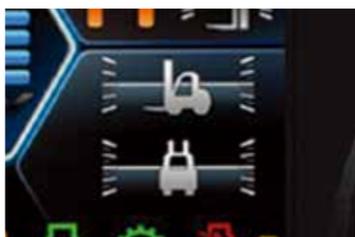


Machine inclination warning system

The grade (left) and slope (right) sensors are built into the MCU and provide the grade and slope status information of the vehicle connected with the road surface condition in real time. Also, an alarm is emitted when the KS regulation is exceeded.



Steering wheel position

As a measurement of the steering angle sensor, which is installed on the kingpin of the rear axle, is displayed on the large cluster screen as an image, the operator can predict the direction of the vehicle without difficulty.

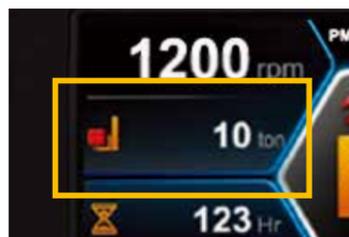

Load weight indicator (OPT)

When lifting a load, a change in hydraulic pressure of the lift line is converted to a measurement of weight displayed in real time, and a warning is given at the time of overload.


## Safety features

The adoption of a high-sensitivity sensor and advanced safety system eliminates the risk of safety accidents.




Auto parking brake

If the operator leaves the seat while the gear lever is in neutral, the parking brake is automatically engaged to secure safety, and released upon the operator's return to the seat.

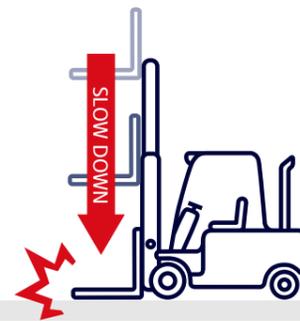

Fork Safety Features

The down-safety valve prevents forks from dropping down in case of sudden damage of hydraulic line.

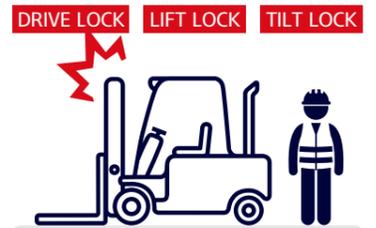

Operator presence sensing system

All mast and drive movements stop functioning when the operator is not in the seat.

Speed limit setting

The operator can set and limit the maximum speed from 10km/h to 30km/h.

Password starting system

The operator can set a passcode to prevent vehicle theft and possible safety accidents in case the vehicle is used by an unauthorized person. (Up to 10 passwords can be set.)



Increased night work efficiency


Four work lamps on the upper side of the mast, two headlamps on the frame fender, and two work lamps on the upper side of the counterweight enable efficient nighttime and indoor operations.



Maintenance & Convenience

# Fast and Easy Maintenance & Convenience Features

An ideal arrangement of components ensures easy access and convenience for maintenance.

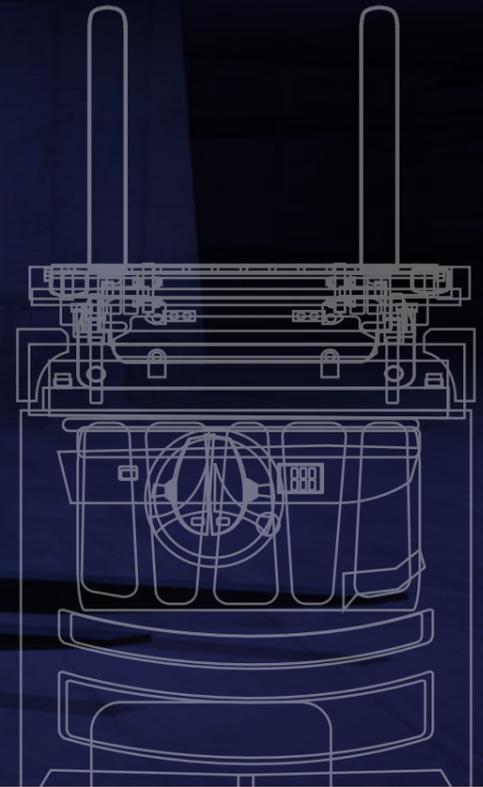

Some of the photos may include optional equipment

## Fully opening tilting cabin and hood

The tilting cabin that has been dramatically improved in its maintainability functions with a separate electric motor and hydraulic pump. By opening the cabin, which can be tilted to a maximum of 54 degrees, and the engine hood, which can be opened to the left or right, all functional components installed inside the chassis can easily be examined and serviced.



Some of the photos may include optional equipment



**Double-filtration air cleaner**

The double-filtration air cleaner filter with large capacity enables longer filter life span. The operator can access the air filter easily by simply opening the engine hood.




**Cabin air cleaner filter**

The air cleaner filter blocks external dust and noise from the cabin, and continuously supplies clean air indoor to maintain fresh air in the driving space.



**Automatic tilting system**

The cabin tilting system allows the operator to tilt the cabin with a single switch up to 54 degrees, thus enabling easy maintenance of functional devices located under the driver seat.

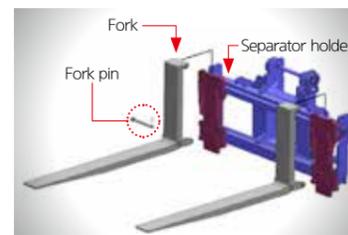

**Separator holder carriage**

To improve handling and easily switch forks and other attachment, separator holder system is adopted as option. It is possible to install various attachments easily.



**Rear view camera**

A rear view camera and monitor are linked to the reverse gear, ensuring safer rear work environment.




**Up-to-date cooling system**

Variable speed and remote controlled fans reduce required engine power and noise, while the aluminum cooler improves durability and heat output.



**Battery master switch**

Damage is prevented during inspection /maintenance of electronic units, and battery discharge.

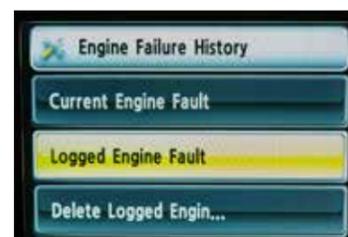

**Engine fault diagnosis**

Details of engine fault diagnosed by the engine control unit (ECU) can be checked on the cluster.



**Maintenance management**

Replacement cycle of consumable items can be checked on the monitor, thus preventing performance deterioration of major functional parts due to failure to notice deterioration.



## Mast specifications



Mast type		Maximum fork height	Overall mast height (lowered)	Tilting Angle Fwd / Bwd	Load capacity (800mm LC)	Truck weight (unloaded)
		mm	mm	deg	kg	kg
2-stage standard mast	V345	3,486	3,593	12 / 10	30,000	38,236
	V400	4,040	3,870	12 / 10	30,000	38,815
	V450	4,540	4,120	12 / 10	30,000	39,092
	V500	5,040	4,370	12 / 10	30,000	39,384
	V550	5,540	4,620	12 / 10	30,000	39,664
	V600	6,040	4,870	12 / 10	30,000	40,248
	V650	6,540	5,120	12 / 10	29,800	40,560
3-stage standard mast	※TS470	4,712	3,400	10 / 10	30,000	41,320
	TS500	5,012	3,500	10 / 10	29,400	41,567
	TS530	5,312	3,600	10 / 10	29,000	41,774
	TS560	5,612	3,700	10 / 10	28,700	41,945
	TS600	6,016	3,835	10 / 10	28,300	42,177
	TS650	6,512	4,000	10 / 10	27,700	42,471

※ : Standard

## Load Capacity

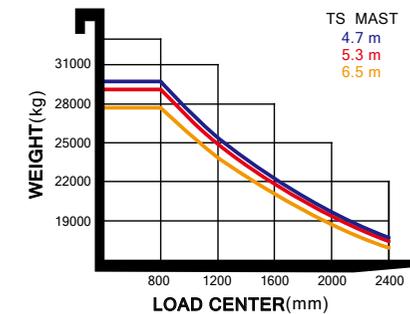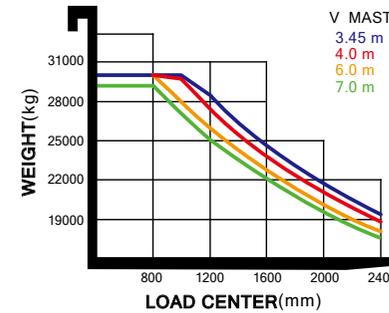

## Optional Items




- Fork(mm)  
110 x 250 x 2,450(STD) / 110 x 250 x 1,800 / 110 x 250 x 2,700 / 110 x 250 x 3,150 / 110 x 250 x 3,650
- Seat : Leather + Seat heater      • Sliding carriage

## Specification



Identification	Load capacity	kg	30,000
	Load center	mm	800
	Maximum lift height ①	mm	4,712
	Loaded / unloaded lift speed	mm/sec	250 / 280
	Loaded / unloaded lower speed	mm/sec	400 / 300
	length x width x height	mm	2,450 x 250 x 110
	Fork Carriage Width ⑭	mm	970 x 2,600
	Tilting Angle (forward ② / backward ③)	degree°	10 / 10
	Extended height ④ / Lowered height ⑤	mm	6,500 / 3,400
	Drive Speed (No Load)	km/hr	30.8
	Gradeability (Full Load)	%(°)	30.4 (17.0)
	Min. Turning Radius ⑥	mm	5,864
Basic Dimensions	Loaded maximum drawbar pull (Full Load, Max)	kg	23,025
	Gross Vehicle Weight (No load)	kg	41,320
	Head length (Without Fork) ⑦ / Overall width ⑧	mm	6,520 / 3,080
	Overall Height (Overhead Guard Height) ⑨	mm	3,278
	Ground clearance ⑩ / Wheel base distance ⑪	mm	290 / 4,250
	Tread (front ⑫ / rear ⑬)	mm	2,212 / 2,140
Engine	Tires (front / rear)	-	14.00-24-32PR
	Manufacturer / Model	-	Cummins / QSL9
	Rated output (Gross)	ps/rpm	278 / 2,200
	Max. torque	kgf·m/rpm	124 / 1,500
Displacement	cc	8,849	

## Dimension

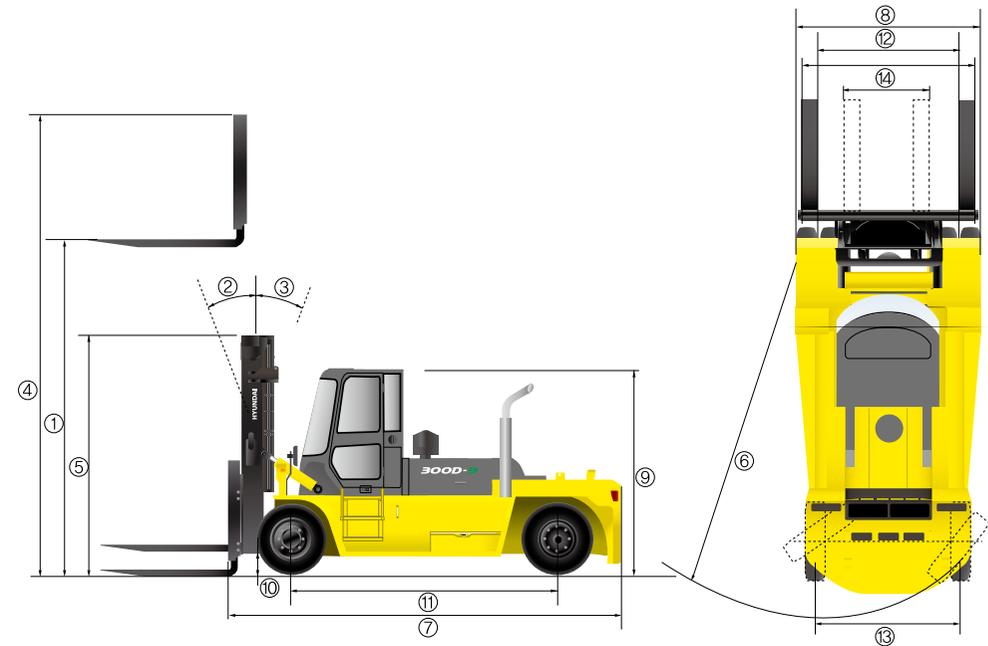

\* Some of the data may change depending on optional equipment.